

Victorian Sliders

SASH WINDOWS



100% lead free virgin material extruded in the UK

Reinforcement (thermal insert) 100% recycled material

Improved Thermal Efficiency

Fully featured sculptured profiles

Design closely replicates traditional timber sashes

Integral security bar on cill

Reduced sight lines

Range of Georgian Bar options

Sash Horn options

Transom drop options - equal - 60/40 - 70/30

Can be coupled or inserted into 90 deg. or splayed bays

Wide range of standard colours / foils - additional colours available on request

A selection of hardware in a variety of colours and finishes

Tested to BS 6375-1 2009 - Performance of Windows and Doors - PASSED

Air Permeability 600Pa/ Class 2

Water Tightness under static pressure 200Pa / Class 5A

Wind Resistance / Class 4

Energy Rated 'B' as standard, by changing glass specification


A+1 or A+6 can be easily achieved with minimal extra cost

Easy clean feature as standard


Sizes up to 1600mmx 3000mm




Horizontal section through top sash

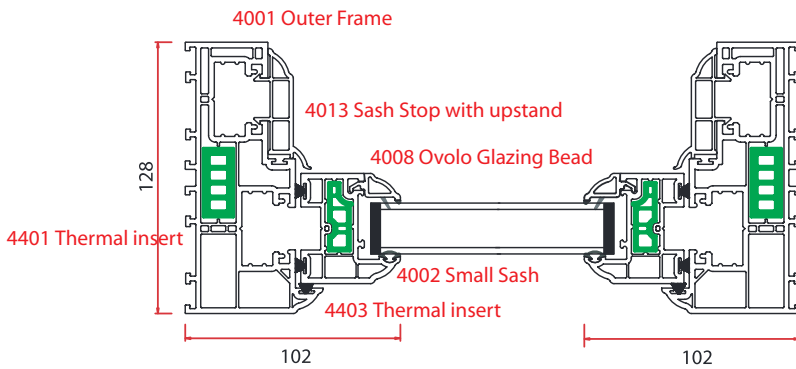

Vertical section through sash

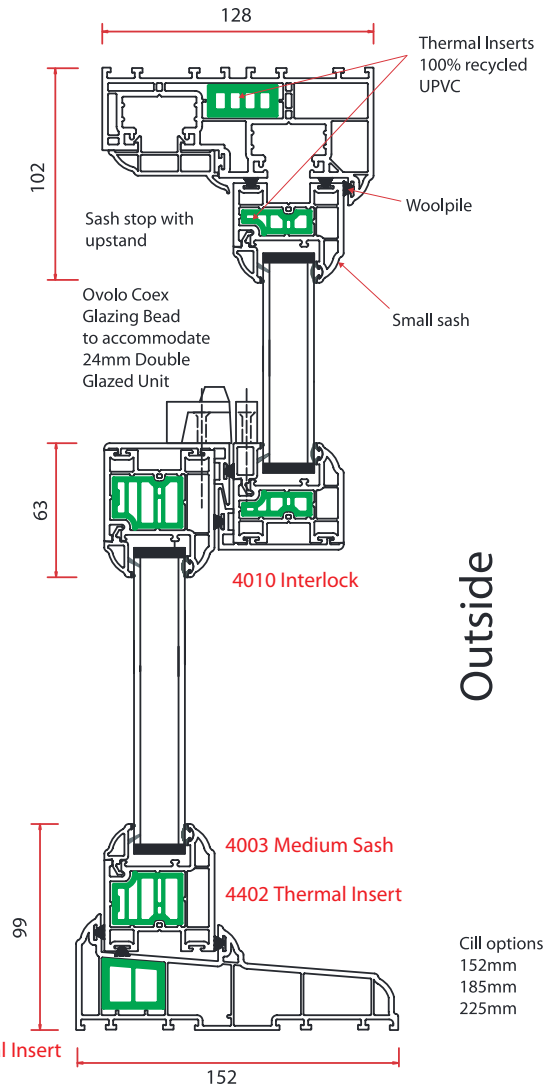

Horizontal section through bottom sash

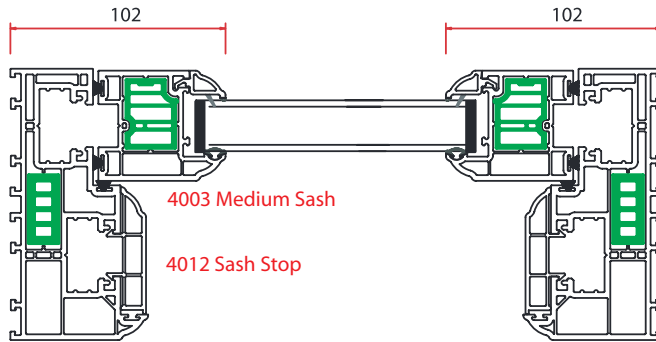

Outside


B Rating Specification - STANDARD							
Outer Pane	Spacer	Inner Pane	Uw	gw	WER	BFRC	
Optiwhite	Aluminium W/ 11mm PU + PIB	K Glass OW	1.70	0.49	-9.34	B	B-9
A Rating Specification - Option 1							
Outer Pane	Spacer	Inner Pane	Uw	gw	WER	BFRC	
Optiwhite	Swiss Spacer	K Glass OW	1.54	0.49	1.62	A	A+1
A Rating Specification - Option 2							
Outer Pane	Spacer	Inner Pane	Uw	gw	WER	BFRC	
Diamant	Swiss Spacer	Planitherm Total	1.32	0.44	5.76	A	A+6

A+6 Fully reinforced – two reinforcements to frame and cill


A+1 Part Reinforced – single reinforcement to frame and cill

B-9 Part Reinforced – single reinforcement to frame and cill


Quick Reference Chart

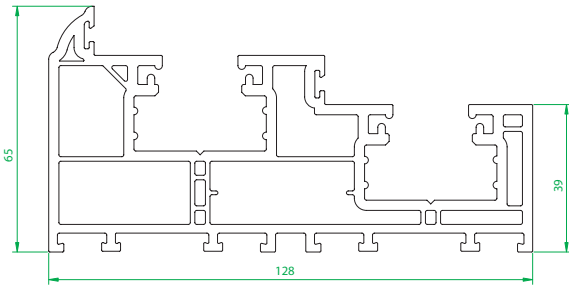


4001
Outer Frame

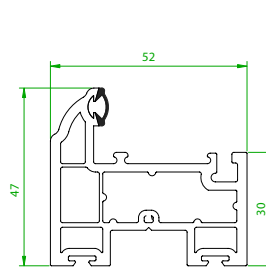


4002
Small Sash

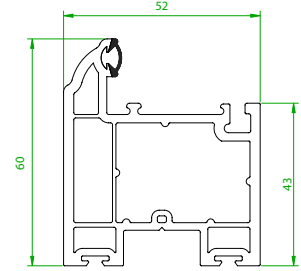


4003
Medium Sash

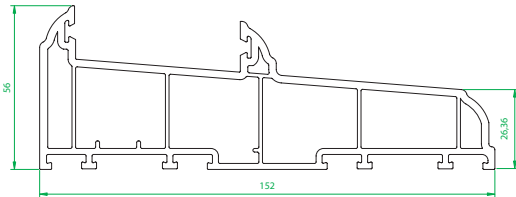

4005
150mm Cill

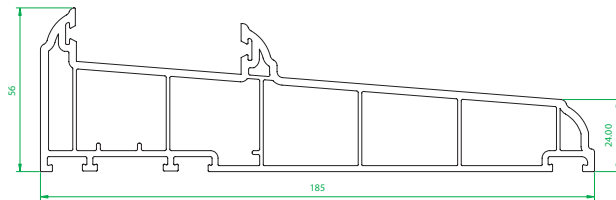


4006
185mm Cill

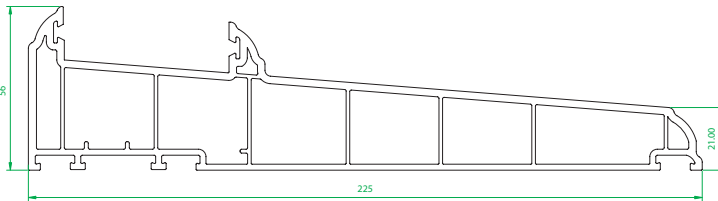


4007
225mm Cill




4008
24mm Ovolo Co Ex
Glazing Bead




4009
24mm Square Co Ex
Glazing Bead

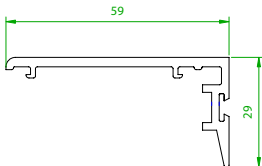


4010
Interlock




4012
Sash Stop




4013
Sash Stop with upstand




4101
Georgian Bar




4120
20mm Add On




4401
Thermal Insert
For 4003 Medium Sash



4402
Thermal Insert
For 4003 Medium Sash



4403
Thermal Insert
For 4002 Small Sash



4405
Thermal Insert
For 4005,4006,4407 cill